

Be Off The Grid com Inc.

"Saving the planet one light at a time"



Item Number	BL-WP02-40W-277-XX
Certificates	UL.cUL(E345599)
Voltage	100-240/277Vac
LED Type	Samsung LH351B
LED Power	40W
Power Supply	--
Led Luminous Efficiency	90lm/W
Led Initial Flux	3,600lm
Color Temperature	3000K,5000K (DLC)
Color Rendering Index	Ra>75
Finish	Bronze
MH Equivalence	Up to 150W

Be Off The Grid com Inc.



LED Wall Pack

Model Number


BL-WP02-40W-277-XX
BL-WP02-60W-277-XX
BL-WP02-80W-277-XX

Performance Summary

- ⊙ 40W/60W/80W to replace 150W up to 400W MH
- ⊙ 80lm/W for fixture
- ⊙ High performance Samsung chip
- ⊙ Outdoor application of IP65 rated.
- ⊙ Finish: Bronze
- ⊙ Easy installation, fitting all different kinds of junction box
- ⊙ 5 year warranty
- ⊙ UL/cUL listed, DLC(Only for 5000K)

Application

Provides maintenance-free illumination for outdoor use in residential and commercial applications such as retail, education, multi-unit housing and storage. Ideal for lighting building facades, parking areas, walkways, garages, loading areas and any other outdoor space requiring reliable safety and security

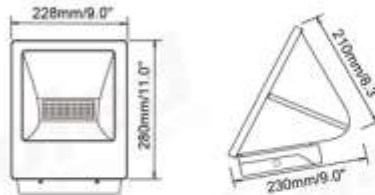

SPECIFICATION




LM79
LM80




Be Off The Grid com Inc.

Distribution Curve

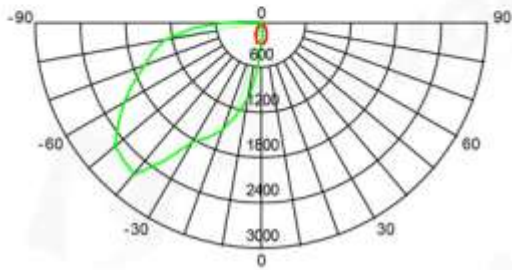


BL-WP02-40W-277-XX Average Beam Angle(50%) : 63.2 DEG

UNIT:cd
— V 0.0DEG PLAN
— H 0.0DEG PLAN

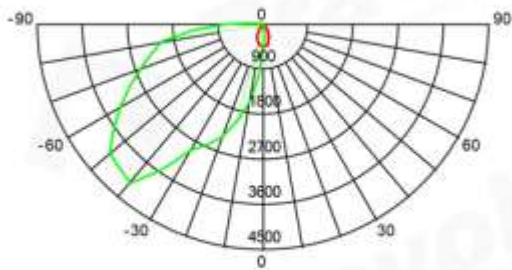

BL-WP02-60W-277-XX Average Beam Angle(50%) : 63.2 DEG

UNIT:cd
— V 0.0DEG PLAN
— H 0.0DEG PLAN

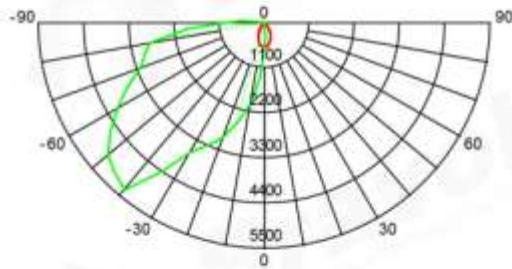

BL-WP02-80W-277-XX Average Beam Angle(50%) : 63.2 DEG

UNIT:cd
— V 0.0DEG PLAN
— H 0.0DEG PLAN




LM79
LM80




Be Off The Grid com Inc.


Isolux Diagram

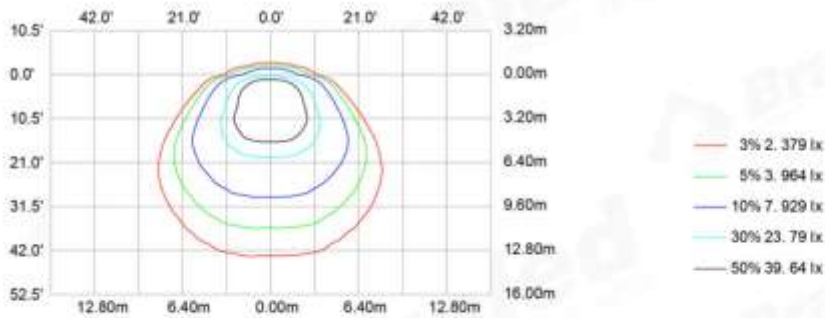

BL-WP02-40W-277-XX MOUNTING HEIGHT: 13'(4.0m)

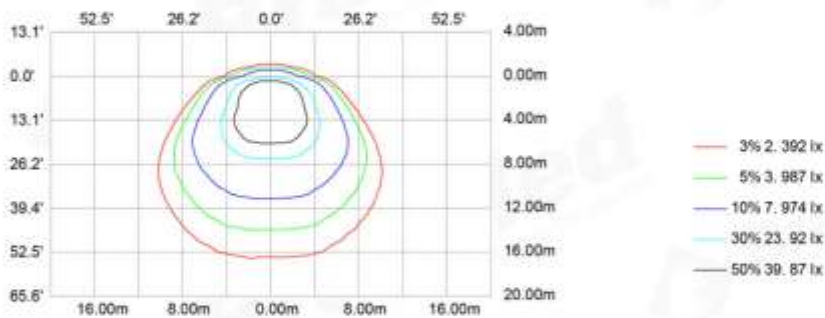

BL-WP02-60W-277-XX MOUNTING HEIGHT: 16'(5.0m)

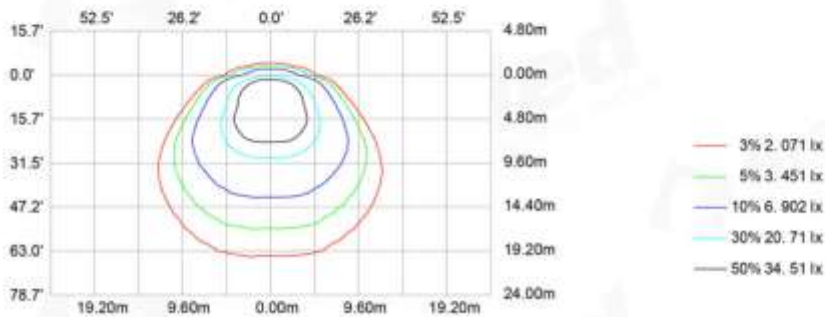

BL-WP02-80W-277-XX MOUNTING HEIGHT: 20'(6.0m)




LM79
LM80




Be Off The Grid com Inc.

Installation

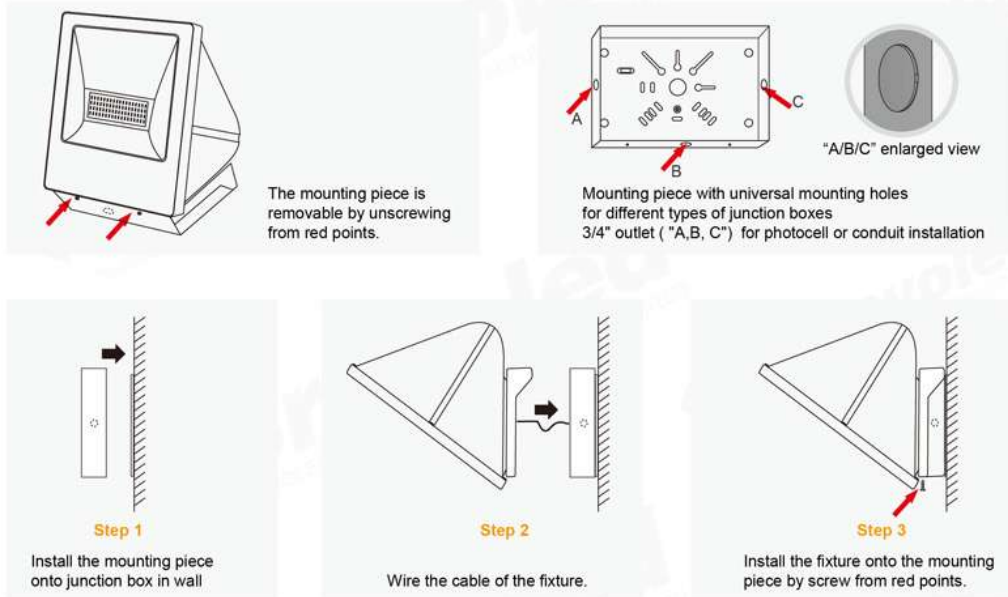

Packaging

Carton size	G.W/Carton	Quantity
300x280x210mm	5KG	1pcs

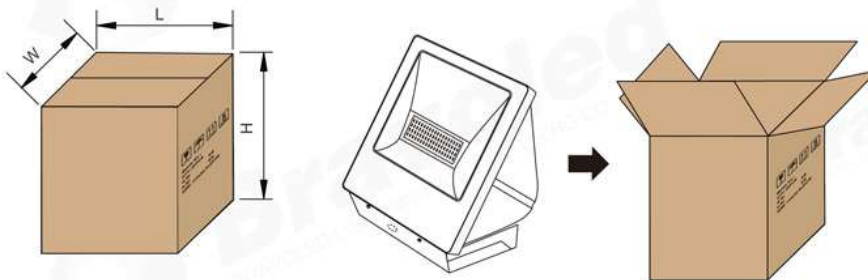

LM79
LM80

